


Sinexcel


MIRA HOME CHARGER

Specification

Cable Version

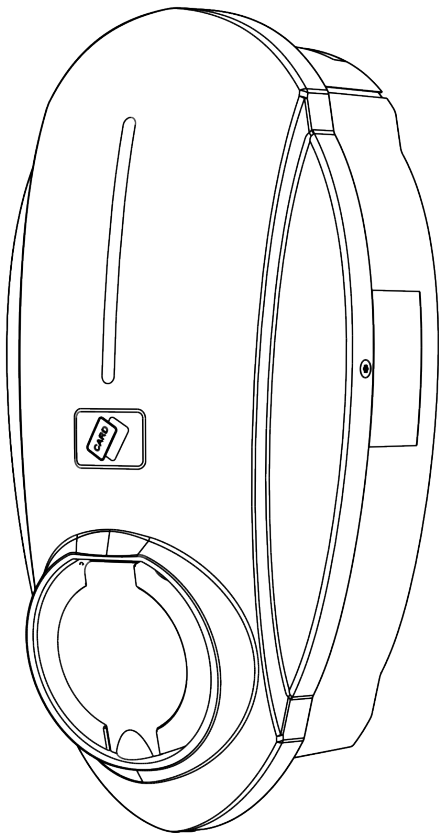

Socket Version

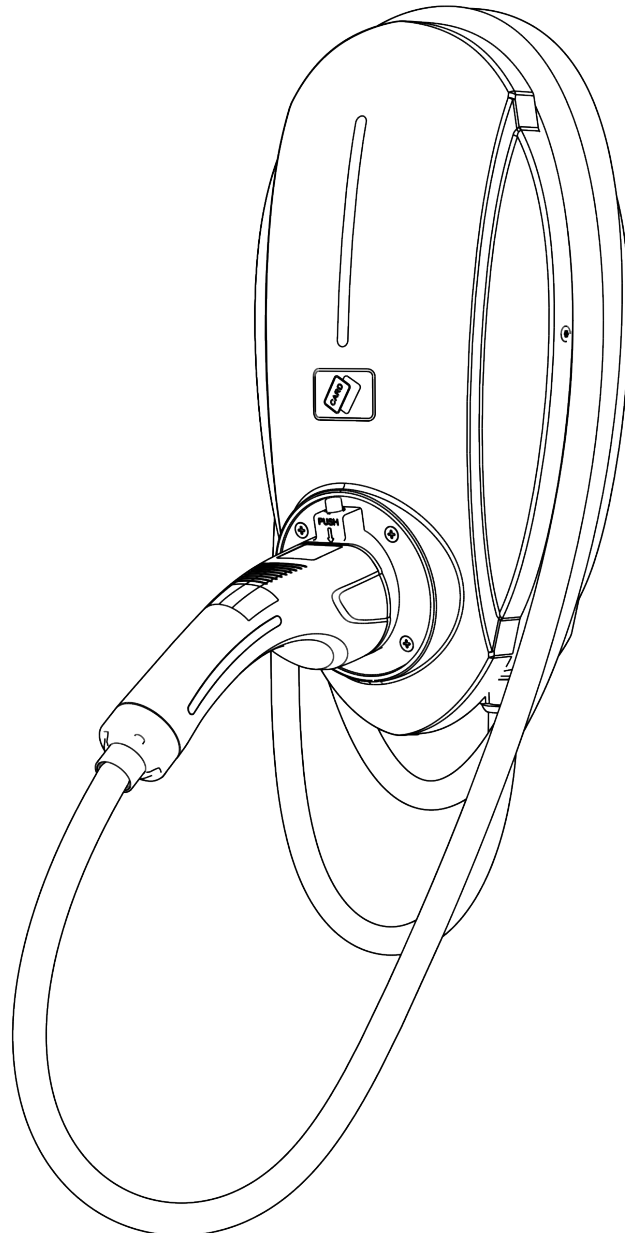

Mira Home Charger		
Rated Power	7kW Socket Version	7kW Cable Version
Application scenarios	Residential / Commercial Use	
Input/Output Voltage	Single-Phase 230V(±10%)	
Input/Output Current	32A	
Weight	2.35KG	2.5KG
Protection Rating	IP55/IK09	IP65/IK09
Dimensions	W200*H385*D145	
Frequency	50Hz/60Hz	
Connector	IEC Type2	
Cable Length	/	5m (3m,7m optional)
Charging Status information	LED	
Charging Mode	Plug and Charge/ RFID/ App	
Metering	On-board metering (level B , ±1%)	
Installation	Floor-mounted/ Wall-mounted	
Protection Function	Overcurrent protection, overvoltage/undervoltage protection, lightning protection, short circuit protection, ground fault protection (built-in PEN fault device, support UK PEN Fault protection) etc.	
Operation Temperature	-30°C-55°C	
Operating Altitude	<2000m	
Relative Humidity	5%-95%	
RCD	Built in Type A + DC 6mA	
EMC	Class B	
Certification	CE/ TUV mark/ RCM/ TR25/ UKCA	
Color	Silver	